

VeriShield™ VS120DH Passive Earmuff


Honeywell

HOWARD
LEIGHT

PRODUCT INFORMATION

Rev.:
01

Date:
2019.11.12

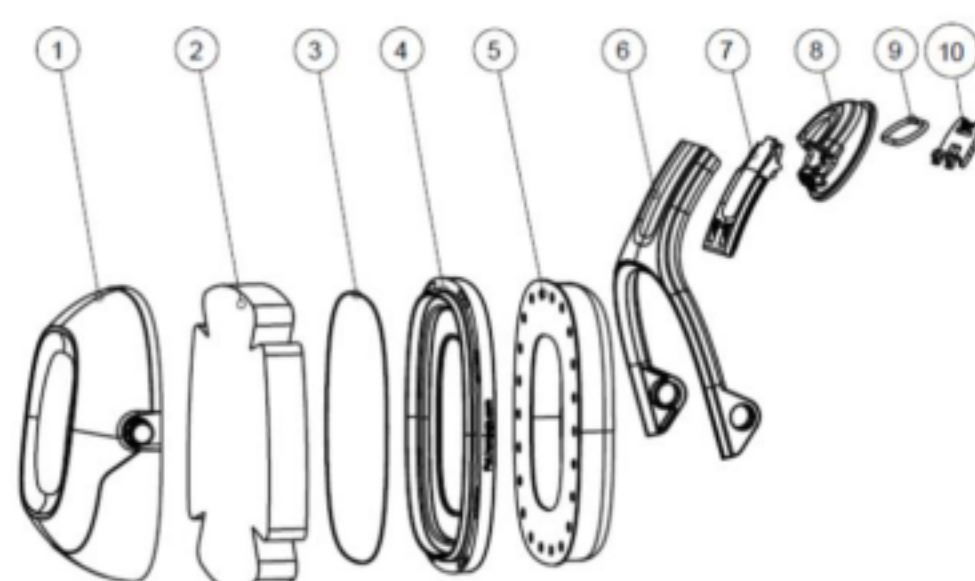

SPECIFICATIONS

ARTICLE		VeriShield Passive Dielectric Cap-Mounted Earmuff, VS120DH		
MODEL NO		1035201-VS	1035204-VS	1035206-VS
REGION		Americas	AUNZ	EMEA
BARCODES	Box	7312550352014	7312550352045	7312550352069
	Case	17312550352011	17312550352042	17312550352066
WEIGHT		312g	346g	347g
ACCESSORIES	Hygiene Kit	1035137-VS	1035136-VS	1035136-VS
	Cool Pads	1000365	1000365	1000365
SALES UNITS	Box	1 EA	1 EA	1 EA
	Case	10 boxes	10 boxes	10 boxes
VOLUME	Box	L145*W105*H170mm 2.59dm ³	L145*W105*H170mm 2.59dm ³	L145*W105*H170mm 2.59dm ³
	Case	L540*W305*H202mm 33.27dm ³	L540*W305*H202mm 33.27dm ³	L540*W305*H202mm 33.27dm ³
MATERIAL	Box	Cardboard	Cardboard	Cardboard
	Case	Corrugated cardboard	Corrugated cardboard	Corrugated cardboard

POS.	PART LISTING	MATERIAL	COLOR
1	Ear Cup	ABS	NCS 8500-N
2	Absorber Foam	PU	PMS 7621C
3	O-ring	Silicon	NATURAL
4	Rim	PP	NCS 8500-N
5	Ear Cushion	PVC & Memory Foam	NCS 9000-N
6	Fork	PC/PBT	NCS 8500-N
7	Slide	POM	NCS 8500-N
8	Combo	POM	NCS 8500-N
9	Spring	PC/PBT	NCS 8500-N
10	Cap	POM	NCS 8500-N



LIMA
Cal. Huayucari 172 Coop. 27 de Abril - Ate
AREQUIPA
Cal. Las Orquídeas 204-206 Urb. Primavera - Yanahuara
LA LIBERTAD
Av Teodoro Valcárcel 784-786 - Trujillo

Central Telefonica
01 624 3435

ventas@imrecard.com

VeriShield™ VS120DH Passive Earmuff

Honeywell

HOWARD
LEIGHT

PRODUCT INFORMATION

Rev.:
01

Date:
2019.11.12

CUSTOM TARIFFS

39269099

COUNTRY OF ORIGIN

China

TEMPERATURE OPERATION RANGE

0°C to +55°C/32°F to +131°F

PRODUCT MARKING

"Honeywell HOWARD LEIGHT" - cup

"VS120DH" – cup

NRR

VeriShield™ VS120DH Passive Earmuff is tested according to ANSI S3.19-1974 at Michael & Associates Inc.

Frequency Hz	125	250	500	1000	2000	3150	4000	6300	8000	NRR
Mean Value, dB	18.8	21.3	28.3	35.7	36.3	37.0	37.3	38.1	39.3	25 dB
Standard Deviation, dB	3.4	2.3	2.7	3.1	3.1	3.0	3.0	3.3	3.4	
CSA Class A	Clamping force: 2.1 lbs									

SNR

VeriShield™ VS120DH Passive Earmuff is tested according to EN 352-1:2002 at Michael & Associates Inc.

Frequency Hz	125	250	500	1000	2000	4000	8000	SNR
Mean Value, dB	18.5	21.1	27.9	34.9	38.0	39.0	38.6	31 dB
Standard Deviation, dB	3.4	2.3	2.3	3.1	2.9	2.1	4.5	
APV, dB	15.1	18.8	25.6	31.8	35.1	37.0	34.2	
H=35 dB M=28 dB L=21 dB	Clamping force: S/9.0N M/10.1N L/11.0N							

SLC80

VeriShield™ VS120DH Passive Earmuff is tested according to AS/NZS 1270:2002 at Michael & Associates Inc.

Frequency Hz	125	250	500	1000	2000	4000	8000	SLC80
Mean Attenuation, dB	16.5	17.6	25.0	31.2	36.9	36.8	37.5	27 dB
Standard Deviation, dB	3.5	4.6	4.3	4.6	3.2	4.8	5.6	
Mean-Minus-Std Deviation, dB	13.0	13.0	20.7	26.6	33.7	32.0	31.9	
Class 5	Clamping force:			S/9.3N	M/9.3N	L/9.8N		

For more information

www.honeywellsafety.com

Honeywell Industrial Safety

9680 Old Bailes Road, Fort Mill, SC 29707

Phone: 803-835-8000

Fax: 401-232-3110



LIMA
Cal. Huayucari 172 Coop. 27 de Abril - Ate
AREQUIPA
Cal. Las Orquídeas 204-206 Urb. Primavera - Yanahuara
LA LIBERTAD
Av Teodoro Valcárcel 784-786 - Trujillo

Central Telefonica
01 624 3435

ventas@imrecard.com