


VeriShield™ VS110DF Passive Earmuff

Honeywell
HOWARD
LEIGHT

PRODUCT INFORMATION

Rev.:
01

Date:
2019.11.12

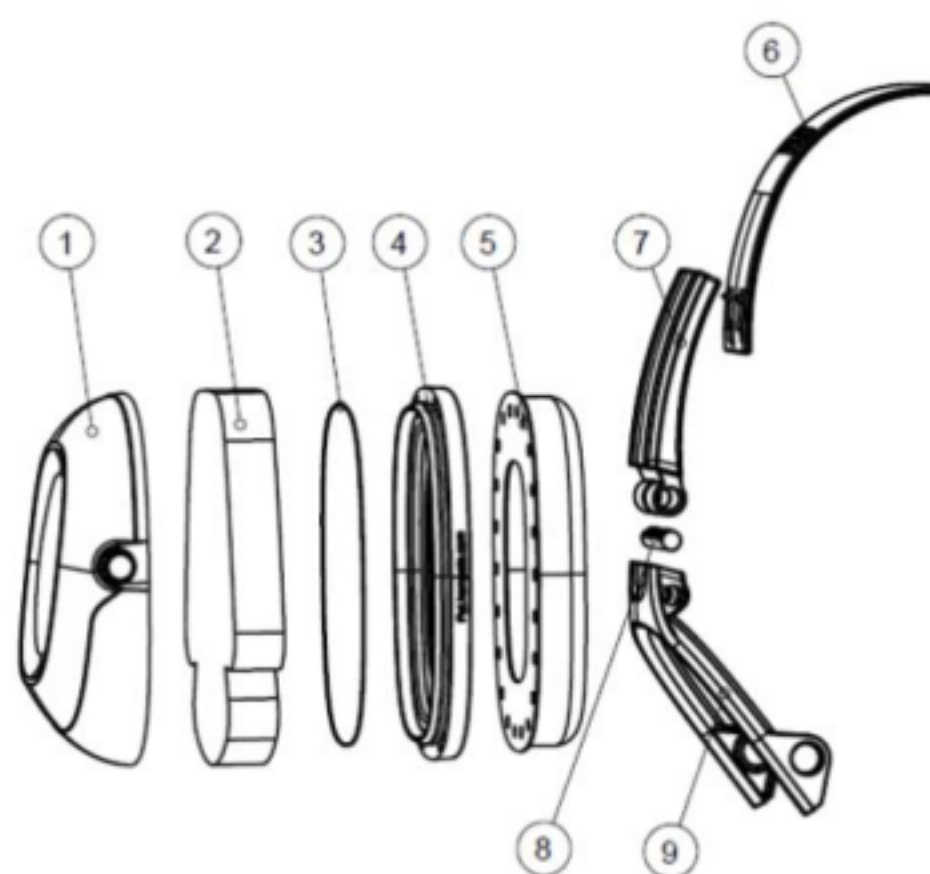

SPECIFICATIONS

ARTICLE		VeriShield Passive Dielectric Folding Earmuff, VS110DF	
MODEL NO		1035199-VS	
REGION		AUNZ	
BARCODES	Box	7312550351994	
	Case	17312550351991	
WEIGHT		281g	
ACCESSORIES	Hygiene Kit	1035136-VS	
	Cool Pads	1000365	
SALES UNITS	Box	1 EA	
	Case	10 boxes	
VOLUME	Box	L145*W105*H195mm	
		2.97dm^3	
	Case	L540*W305*H226mm	
		37.22dm^3	
MATERIAL	Box	Cardboard	
	Case	Cardboard	

POS.	PART LISTING	MATERIAL	COLOR
1	Ear Cup	ABS	NCS 8500-N
2	Absorber Foam	PU	PMS 7621C
3	O-ring	Silicon	NATURAL
4	Rim	PP	NCS 8500-N
5	Ear Cushion	PVC & Memory Foam	NCS 9000-N
6	Headband	POM	NCS 8500-N
7	Slide	PC/PBT	NCS 8500-N
8	Pin	POM	NCS 9000-N
9	Fork	PC/PBT	NCS 8500-N



LIMA
Cal. Huayucan 172 Coop. 27 de Abril - Ate
AREQUIPA
Cal. Las Orquídeas 204-206 Urb. Primavera - Yanahuara
LA LIBERTAD
Av Teodoro Valcárcel 784-786 - Trujillo

Central Telefonica
01 624 3435

ventas@imrecard.com

VeriShield™ VS110DF Passive Earmuff

Honeywell

HOWARD
LEIGHT

PRODUCT INFORMATION

Rev.:
01

Date:
2019.11.12

CUSTOM TARIFFS

39269099

COUNTRY OF ORIGIN

China

TEMPERATURE OPERATION RANGE

0°C to +55°C/32°F to +131°F

PRODUCT MARKING

"Honeywell HOWARD LEIGHT" - cup

"VS110DF" - cup

NRR

VeriShield™ VS110DF Passive Earmuff is tested according to ANSI S3.19-1974 at Michael & Associates Inc.

Frequency Hz	125	250	500	1000	2000	3150	4000	6300	8000	NRR
Mean Value, dB	19.6	20.6	29.2	35.8	36.4	38.2	38.9	39.1	39.4	25 dB
Standard Deviation, dB	2.8	2.3	2.3	2.5	3.3	3.3	3.1	2.4	2.8	
CSA Class A	Clamping force: 2.9 lbs									

SNR

VeriShield™ VS110DF Passive Earmuff is tested according to EN 352-1:2002 at Michael & Associates Inc.

Frequency Hz	125	250	500	1000	2000	4000	8000	SNR
Mean Value, dB	18.6	20.2	28.4	35.9	36.4	39.2	39.3	31 dB
Standard Deviation, dB	3.0	1.9	2.1	2.4	2.6	3.0	2.7	
APV, dB	15.5	18.4	26.3	33.5	33.7	36.2	36.6	
H=35 dB M=28 dB L=21 dB	Clamping force: S/11.0N M/12.1N L/11.0N							

SLC80

VeriShield™ VS110DF Passive Earmuff is tested according to AS/NZS 1270:2002 at Michael & Associates Inc.

* Permitted to be tested according to EN12512-2:2002 at 1000 Hz or 2000 Hz								
Frequency Hz	125	250	500	1000	2000	4000	8000	SLC80
Mean Attenuation, dB	19.2	18.2	27.0	34.0	34.7	39.7	38.1	30 dB
Standard Deviation, dB	3.0	2.3	2.4	2.2	3.2	1.7	3.2	
Mean-Minus-Std Deviation, dB	16.2	15.9	24.6	31.8	31.5	38.0	34.9	
Class 5	Clamping force:			S/12.9N	M/13.3N	L/12.9N		

For more information

www.honeywellsafety.com

Honeywell Industrial Safety

9680 Old Bailes Road, Fort Mill, SC 29707

Phone: 803-835-8000

Fax: 401-232-3110



LIMA
Cal. Huayucari 172 Coop. 27 de Abril - Ate
AREQUIPA
Cal. Las Orquídeas 204-206 Urb. Primavera - Yanahuara
LA LIBERTAD
Av Teodoro Valcárcel 784-786 - Trujillo

Central Telefonica
01 624 3435

ventas@imrecard.com